


Freestanding clear acrylic screens, unframed

including feet: may be screw fixed to a surface if desired

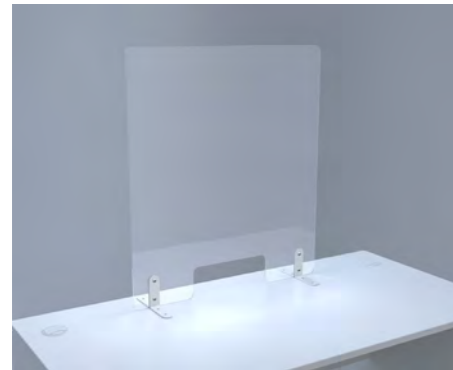

660MM HIGH, FULLY GLAZED, FREESTANDING

PLAIN

Width mm Code

600 U60066GF/~~

800 U80066GF/~~

1000 U10066GF/~~

1200 U12066GF/~~

1400 U14066GF/~~

WITH PACKAGE PASS-THROUGH

Width mm Code

600

800 U80066GFP/~~

1000 U10066GFP/~~

1200 U12066GFP/~~

1400 U14066GFP/~~

1060MM HIGH, FULLY GLAZED, FREESTANDING

PLAIN

Width mm Code

600 U60010GF/~~

800 U80010GF/~~

1000 U10010GF/~~

1200 U12010GF/~~

1400 U14010GF/~~

WITH PACKAGE PASS-THROUGH

Width mm Code

600

800 U80010GFP/~~

1000 U10010GFP/~~

1200 U12010GFP/~~

1400 U14010GFP/~~

SPECIFICATIONS AND USAGE EXAMPLES

As standard, all screens supplied with two pairs of stabilising L-shaped feet and two flat plates. L-shape feet are used to make the screen freestanding. Optionally, flat plates can replace the L-shape feet on one side so that the screen can be positioned right up to the edge of a surface: this may be desirable on a reception desk. Where the flat plates are used in this way the screen must be fixed to the supporting surface with screws (provided).

Fully freestanding screens may also be screw fixed if desired.

ON RECEPTIONS

1060mm high screens may be used on desks/reception desk to create a barrier against standing people 1795mm high (desk 735mm + screen 1060mm). This will match in height 660mm screens placed on X-Range deskcovers (desk 735mm + deskcover 400mm + screen 660mm).


Package pass-through cut-outs provide a gap 300mm wide x 120mm high in the centre of the base of the screen, through which packages may be passed.

ON BENCH DESKS AND MEETING TABLES

660mm high screens may be used as transverse screens on bench desks (i.e. between users seated side by side) and along the centre of meeting tables.

Metal finishes

REPLACE ~~ WITH FINISH

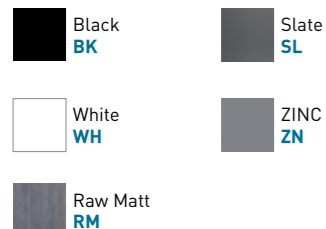


SPA glazed extension screens, unframed

clear 5mm acrylic: including brackets to connect to SPA screens



Shown with freestanding clear acrylic screens used as transverse barriers

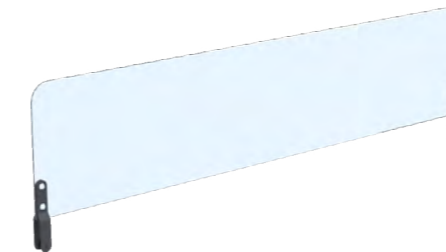

330MM HIGH EXTENSION, FULLY GLAZED

Width mm Code

600 SU60033GE/~~

800 SU80033GE/~~

1000 SU10033GE/~~

1200 SU12033GE/~~

1400 SU14033GE/~~

1431 SU14333GE/~~

1600 SU16033GE/~~

1631 SU16333GE/~~

1800 SU18033GE/~~

2000 SU20033GE/~~

660MM HIGH EXTENSION, FULLY GLAZED

Width mm Code

600 SU60066GE/~~

800 SU80066GE/~~

1000 SU10066GE/~~

1200 SU12066GE/~~

1400 SU14066GE/~~

1431 SU14366GE/~~

1600 SU16066GE/~~

1631 SU16366GE/~~

1800 SU18066GE/~~


2000 SU20066GE/~~



Unframed extension screens can be attached to the top of any SPA screen, desk-mounted or freestanding.

Universal glazed extension screens, unframed

clear 5mm acrylic: including brackets to clamp to screens 20-35mm thick

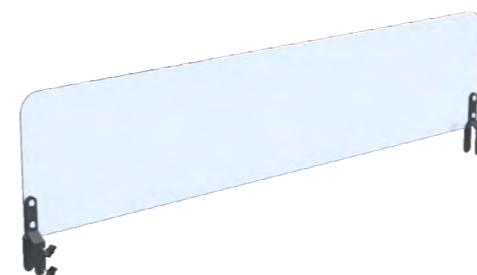

330MM HIGH EXTENSION, FULLY GLAZED

Width mm Code

600 SUU60033GE/~~

800 SUU80033GE/~~

1000 SUU10033GE/~~

1200 SUU12033GE/~~

1400 SUU14033GE/~~

1431 SUU14333GE/~~

1600 SUU16033GE/~~

1630 SUU16333GE/~~

1800 SUU18033GE/~~

2000 SUU20033GE/~~

660MM HIGH EXTENSION, FULLY GLAZED

Width mm Code

600 SUU60066GE/~~

800 SUU80066GE/~~

1000 SUU10066GE/~~

1200 SUU12066GE/~~

1400 SUU14066GE/~~

1431 SUU14366GE/~~

1600 SUU16066GE/~~

1630 SUU16366GE/~~

1800 SUU18066GE/~~

2000 SUU20066GE/~~